



# ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025

MuoviTech Manifold Chamber with Iron Lid

**Muovitech AB**



**EPD HUB, HUB-4408**

Published on 10.11.2025, last updated on 10.11.2025, valid until 09.11.2030

Life Cycle Assessment study has been performed in accordance with the requirements of EN 15804, EPD Hub PCR version 1.2 (24 Mar 2025) and JRC characterization factors EF 3.1.

## GENERAL INFORMATION

### MANUFACTURER

Manufacturer	Muovitech AB
Address	Tvinnargatan 11, 507 30 Brämhult, Sweden
Contact details	info@muovitech.com
Website	https://www.muovitech.com/

### EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804:2012+A2:2019/AC:2021 and ISO 14025
PCR	EPD Hub Core PCR Version 1.2, 24 Mar 2025 EN 16903 Product Category Rules (PCR) for buried plastics piping systems
Sector	Construction product
Category of EPD	Third party verified EPD
Parent EPD number	-
Scope of the EPD	Cradle to gate with options, A4-A5, and modules C1-C4, D
EPD author	Kajsa Jansson and Daniel Almgren, Muovitech AB
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal verification <input checked="" type="checkbox"/> External verification
EPD verifier	Sarah Curpen, as an authorised verifier acting for EPD Hub Limited

This EPD is intended for business-to-business and/or business-to-consumer communication. The manufacturer has the sole ownership, liability, and

responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

### PRODUCT

Product name	MuoviTech Manifold Chamber with Iron Lid
Additional labels	Manifold Chamber DN650, Manifold Chamber DN850, Manifold Chamber DN1200, Manifold Chamber Compact
Product reference	DN650, DN850, DN1200, Compact
Place(s) of raw material origin	Europe, Asia
Place of production	Finland, Sweden, United Kingdom
Place(s) of installation and use	World wide
Period for data	01/01/2023-31/12/2023
Averaging in EPD	Multiple products and multiple factories
Variation in GWP-fossil for A1-A3 (%)	-33% to +18%
GTIN (Global Trade Item Number)	-
NOBB (Norwegian Building Product Database)	-
A1-A3 Specific data (%)	0,68

**ENVIRONMENTAL DATA SUMMARY**

<b>Declared unit</b>	1 kg of MuoviTech Manifold Chamber with Iron Lid
<b>Declared unit mass</b>	1 kg
<b>Mass of packaging</b>	0,13 kg
<b>GWP-fossil, A1-A3 (kgCO<sub>2</sub>e)</b>	23,8
<b>GWP-total, A1-A3 (kgCO<sub>2</sub>e)</b>	24,5
<b>Secondary material, inputs (%)</b>	113
<b>Secondary material, outputs (%)</b>	0
<b>Total energy use, A1-A3 (kWh)</b>	97,2
<b>Net freshwater use, A1-A3 (m<sup>3</sup>)</b>	0,23

## PRODUCT AND MANUFACTURER

### ABOUT THE MANUFACTURER

Muovitech is a leading European manufacturer specializing in innovative solutions for geothermal energy systems. Founded in Sweden, Muovitech operates globally with production facilities in multiple countries, offering high-quality products such as manifold chambers, collector pipes, and geenergy accessories. The company is committed to sustainability, delivering energy-efficient solutions that reduce environmental impact and support the transition to renewable energy. With a focus on innovation, reliability, and customer service, Muovitech continues to set the standard in the geenergy industry.

### PRODUCT DESCRIPTION

Muovitech's manifold chambers DN650, DN850, DN1200, and Compact are specially designed for geothermal systems. The wide range, from 2 to 20 connections, provides flexibility in installation and ensures efficient fluid distribution.

The chambers are equipped with carefully selected flow meters and shut-off valves, available in different sizes and materials to meet various flow requirements and system specifications. For this average EPD, the chambers include an iron lid: the DN650, DN850, and DN1200 models come with a flat iron lid, while the Compact chamber is delivered with an iron lid and a pre-welded extension ring.

Further information can be found at:  
<https://www.muovitech.com/>

### PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass %	Material origin
Metals	66	Europe, Asia
Minerals	-	-
Fossil materials	34	Europe, Asia
Bio-based materials	-	-

### BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0,064

### FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 kg of MuoviTech Manifold Chamber with Iron Lid
Mass per declared unit	1 kg
Functional unit	-
Reference service life	-

### SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

# PRODUCT LIFE-CYCLE

## SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
X	X	X	X	X	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction / demolition	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not declared = ND. Modules not relevant = MNR

## MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

A location-based approach is used in modelling the electricity mix utilized in the factory.

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

Muovitech’s manifold chambers are primarily made from HDPE and iron, sourced as virgin material. The raw materials are transported by truck to the manufacturing facility, where the chambers are manufactured in different variations, from different diameters for main pipes, outlets and with a wide range of valves. Measures are taken to optimize energy use and minimize emissions during production. The finished products are typically packaged in plastic film and re-usable EPAL wooden pallets, with efforts made to reduce material usage and waste. Origin that has been used in this model refers to places where the components are produced in.

## TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts occurred from final products delivery to construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions.

The average transport distance from the production plant to the construction site is assumed to be 275 km, and the transport method is assumed to be a lorry. Transport does not cause losses, because products are packed properly. During transportation there is no product or packing loss.

## PRODUCT USE AND MAINTENANCE (B1-B7)

This EPD does not cover the use phase.

Air, soil, and water impacts during the use phase have not been studied.

## PRODUCT END OF LIFE (C1-C4, D)

### C3: Waste Processing

At the end of its life, the manifold chamber is assumed to be landfilled. No recycling or energy recovery has been modelled in the LCA. This scenario reflects a conservative approach assuming that the manifold chambers remain buried in the ground and are not recovered due to the complexity of removal.

### C4: Disposal

The product is considered to be disposed of in landfill. As HDPE is non-biodegradable and inert, its environmental impact in landfill is considered low. However, it contributes to the overall waste volume. The coated cast iron lid is also non-biodegradable. The protective coating minimizes the risk of metal leaching, especially under wet conditions. Its environmental impact in landfill is therefore also considered low, although it adds to the total waste volume.

### D: Reuse, Recovery, and Recycling Potential


In this EPD, no reuse, recycling or energy recovery has been modelled at the end of life. The manifold chamber is assumed to remain in the ground and be disposed of by landfill after its use phase. This approach is taken to reflect a conservative and realistic scenario, where buried geothermal energy system components are typically not excavated due to cost, system disruption, and practical challenges.

As such, no benefits from material recovery are assigned in Module D. This ensures alignment between the LCA model and the declared assumptions. While polyethylene and cast iron are recyclable material, and may be recyclable in principle, it is not assumed to be recovered or processed further in this assessment. Instead, it is considered non-hazardous waste and disposed of under controlled landfill conditions.


This assumption reflects common end-of-life treatment for subsurface infrastructure in geothermal energy systems, where removal and processing would typically not be feasible or environmentally justifiable.

## SYSTEM DIAGRAM


A1-A2




A3 MANUFACTURING PROCESS

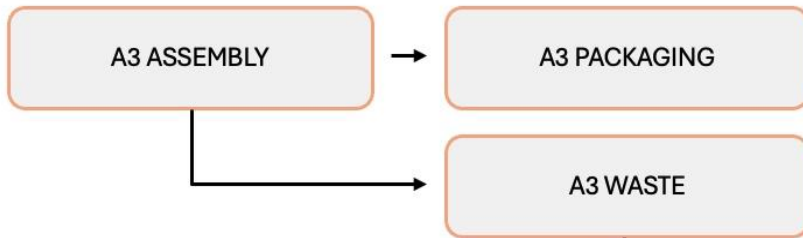


A4-A5

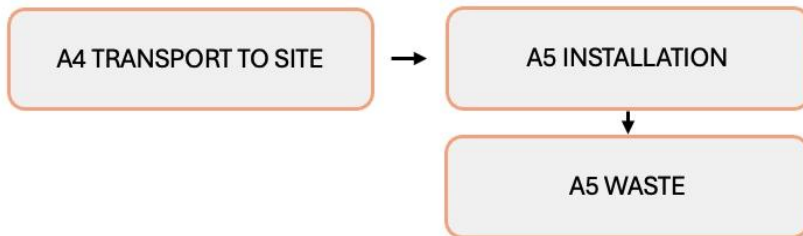


B1-B7



C1-C4

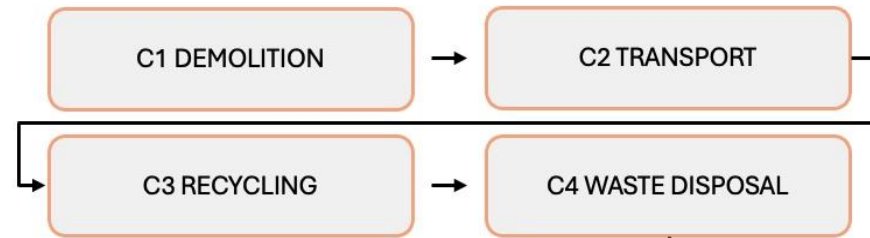

D



# LIFE-CYCLE ASSESSMENT

## CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process that is more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

The production of capital equipment, construction activities, and infrastructure, maintenance and operation of capital equipment, personnel-related activities, energy and water use related to company management and sales activities are excluded.

We don't have Ancillary materials A3 as we purely assembly the items. End of life scenario is that the item is left to the ground, and no transportation is needed for the waste.

Energy as material balancing in A1 is only for the model LCA as it is not affecting to the average GWP value.

Benefits D is updated only to the model LCA, as it does not affect the average GWP value.

## VALIDATION OF DATA

Data collection for production, transport, and packaging was conducted using time and site-specific information, as defined in the general information section on page 1 and 2. Upstream process calculations rely on generic data as defined in the Bibliography section. Manufacturer-provided specific and

generic data were used for the product's manufacturing stage. The analysis was performed in One Click LCA EPD Generator, with the 'Cut-Off, EN 15804+A2' allocation method, and characterization factors according to EN 15804:2012+A2:2019/AC:2021 and JRC EF 3.1.

## ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging material	No allocation
Ancillary materials	No allocation
Manufacturing energy and waste	Allocated by mass or volume

## PRODUCT & MANUFACTURING SITES GROUPING

Type of grouping	Multiple products and multiple factories
Grouping method	Based on a representative product
Variation in GWP-fossil for A1-A3, %	-33% to +18%

The primary data represents the manufacturing of MuoviTech's manifold chambers with iron lid, including Compact, DN650, DN850 and DN1200 variants, produced in Finland, Sweden and UK. The data was used to calculate representative environmental impacts for the various chamber variants. The manufacturing process is largely consistent across all product variants and dimensions, as outlined in this EPD. Differences primarily relate to number of collectors each chamber accommodates, chamber body size, valve options, and outlet sizes.

The variability in primary data or emissions across the products did exceed 40% compared to the representative product. To ensure accurate representation, weighted average was calculated based on each product type's energy consumption and waste generation. The weighting was determined by the production volume and mass share of each product type.

### LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator for EPD Hub V3 v3.2.3. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. The EPD Generator uses Ecoinvent v3.10.1/3.11 and One Click LCA databases as sources of environmental data. Allocation used in Ecoinvent 3.10.1/3.11 environmental data sources follow the methodology 'allocation, Cut-off, EN 15804+A2'.

# ENVIRONMENTAL IMPACT DATA

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

## CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total <sup>1)</sup>	kg CO <sub>2</sub> e	2,45E+01	3,43E-02	-7,04E-02	2,45E+01	3,34E-02	2,45E-01	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	5,62E-02	-2,40E-03
GWP – fossil	kg CO <sub>2</sub> e	2,36E+01	3,43E-02	1,61E-01	2,38E+01	3,34E-02	1,17E-02	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	5,62E-02	-1,25E-02
GWP – biogenic	kg CO <sub>2</sub> e	9,01E-01	6,91E-06	-2,33E-01	6,68E-01	7,03E-06	2,33E-01	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	-1,47E-06	1,01E-02
GWP – LULUC	kg CO <sub>2</sub> e	2,90E-02	1,33E-05	1,53E-03	3,05E-02	1,25E-05	1,09E-04	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	2,51E-06	-1,81E-05
Ozone depletion pot.	kg CFC <sub>-11</sub> e	4,04E-06	6,67E-10	2,25E-08	4,06E-06	6,72E-10	1,71E-10	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	1,44E-10	-1,94E-10
Acidification potential	mol H <sup>+</sup> e	1,09E-01	2,14E-04	1,01E-03	1,10E-01	1,08E-04	4,39E-05	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	4,50E-05	-7,47E-05
EP-freshwater <sup>2)</sup>	kg Pe	9,15E-03	2,16E-06	3,21E-05	9,18E-03	2,25E-06	2,57E-06	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	3,85E-07	-7,18E-06
EP-marine	kg Ne	2,36E-02	6,25E-05	3,67E-04	2,41E-02	3,66E-05	3,08E-05	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	7,19E-04	-1,15E-05
EP-terrestrial	mol Ne	2,28E-01	6,86E-04	3,93E-03	2,33E-01	3,98E-04	1,47E-04	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	1,98E-04	-1,14E-04
POCP (“smog”) <sup>3)</sup>	kg NMVOCe	7,53E-02	2,47E-04	1,22E-03	7,68E-02	1,76E-04	4,69E-05	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	8,22E-05	-4,12E-05
ADP-minerals & metals <sup>4)</sup>	kg Sbe	2,02E-04	8,78E-08	6,91E-07	2,03E-04	9,22E-08	4,00E-08	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	7,11E-09	-2,41E-08
ADP-fossil resources	MJ	4,25E+02	4,87E-01	4,51E+00	4,30E+02	4,84E-01	2,96E-01	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	1,22E-01	-2,24E-01
Water use <sup>5)</sup>	m <sup>3</sup> e depr.	7,11E+00	2,37E-03	1,10E-01	7,22E+00	2,48E-03	8,09E-03	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	3,45E-04	-3,89E-03

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

### ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	1,63E-06	3,11E-09	2,04E-08	1,66E-06	3,32E-09	6,00E-10	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	1,09E-09	-6,30E-10
Ionizing radiation <sup>6)</sup>	kBq 11235a	2,05E+00	5,50E-04	1,81E-01	2,23E+00	5,83E-04	1,35E-02	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	7,29E-05	-3,64E-03
Ecotoxicity (freshwater)	CTUe	9,83E+01	5,54E-02	8,21E-01	9,91E+01	5,70E-02	3,74E-02	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	1,56E-01	-2,48E-02
Human toxicity, cancer	CTUh	1,80E-08	5,81E-12	2,57E-10	1,82E-08	5,50E-12	3,70E-12	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	1,33E-12	-2,58E-12
Human tox. non-cancer	CTUh	4,29E-07	2,96E-10	1,54E-09	4,31E-07	3,14E-10	1,77E-10	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	1,43E-10	-1,04E-10
SQP <sup>7)</sup>	-	8,62E+01	4,41E-01	1,97E+01	1,06E+02	4,87E-01	1,34E-01	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	3,74E-01	-7,00E-02

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low-dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

### USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy <sup>8)</sup>	MJ	3,72E+01	7,50E-03	2,48E+00	3,97E+01	7,88E-03	-1,83E+00	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	1,11E-03	2,21E-01
Renew. PER as material	MJ	2,10E-02	0,00E+00	2,04E+00	2,06E+00	0,00E+00	-2,04E+00	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	-2,10E-02	6,03E-02
Total use of renew. PER	MJ	3,73E+01	7,50E-03	4,53E+00	4,18E+01	7,88E-03	-3,87E+00	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	-1,99E-02	2,81E-01
Non-re. PER as energy	MJ	3,05E+02	4,87E-01	4,31E+00	3,10E+02	4,84E-01	2,27E-01	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	-1,05E+01	-2,24E-01
Non-re. PER as material	MJ	1,37E+01	0,00E+00	1,91E-01	1,39E+01	0,00E+00	-1,95E-01	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	-1,37E+01	4,40E-02
Total use of non-re. PER	MJ	3,19E+02	4,87E-01	4,50E+00	3,24E+02	4,84E-01	3,14E-02	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	-2,41E+01	-1,80E-01
Secondary materials	kg	1,13E+00	2,12E-04	8,03E-03	1,14E+00	2,09E-04	6,91E-05	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	3,44E-05	5,20E-04
Renew. secondary fuels	MJ	6,76E-03	2,45E-06	6,97E-02	7,65E-02	2,64E-06	5,30E-07	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	5,47E-07	-2,03E-07
Non-ren. secondary fuels	MJ	0,00E+00	0,00E+00	8,16E-03	8,16E-03	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of net fresh water	m <sup>3</sup>	2,24E-01	6,78E-05	3,24E-03	2,27E-01	7,14E-05	3,66E-05	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	1,06E-04	-1,48E-04

8) PER = Primary energy resources.

### END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	7,48E+00	6,95E-04	7,18E-03	7,49E+00	7,00E-04	7,37E-04	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	1,35E-04	-8,50E-04
Non-hazardous waste	kg	1,02E+02	1,35E-02	1,94E-01	1,02E+02	1,40E-02	2,97E-01	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	3,47E-01	-4,62E-02
Radioactive waste	kg	5,05E-04	1,36E-07	3,84E-05	5,44E-04	1,44E-07	2,90E-06	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	1,78E-08	-9,34E-07

### END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	7,42E-04	0,00E+00	0,00E+00	7,42E-04	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	1,23E-04	0,00E+00	0,00E+00	1,23E-04	0,00E+00	4,27E-02	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy rec	kg	2,84E-04	0,00E+00	0,00E+00	2,84E-04	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy	MJ	5,41E-03	0,00E+00	0,00E+00	5,41E-03	0,00E+00	2,17E-01	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy – Electricity	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,13E-02	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy – Heat	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,26E-01	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

### ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO <sub>2</sub> e	2,43E+01	3,40E-02	1,62E-01	2,45E+01	3,32E-02	1,45E-02	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	5,33E-02	-1,24E-02
Ozone depletion Pot.	kg CFC <sub>11</sub> e	2,40E-07	5,30E-10	1,69E-08	2,57E-07	5,35E-10	1,45E-10	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	1,14E-10	-1,61E-10
Acidification	kg SO <sub>2</sub> e	8,93E-02	1,67E-04	4,44E-04	8,99E-02	8,17E-05	3,36E-05	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	3,29E-05	-6,33E-05
Eutrophication	kg PO <sub>4</sub> <sup>3</sup> e	1,69E-02	2,90E-05	1,85E-03	1,88E-02	2,07E-05	9,24E-06	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	3,15E-05	-8,15E-06
POCP (“smog”)	kg C <sub>2</sub> H <sub>4</sub> e	6,40E-03	1,16E-05	5,11E-05	6,46E-03	7,68E-06	3,15E-06	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	1,23E-05	-3,86E-06
ADP-elements	kg Sbe	2,00E-04	8,58E-08	6,88E-07	2,01E-04	9,00E-08	3,98E-08	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	6,96E-09	-2,38E-08
ADP-fossil	MJ	4,04E+02	4,78E-01	1,98E+00	4,06E+02	4,74E-01	1,05E-01	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	1,21E-01	-1,60E-01

### ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG <sup>9)</sup>	kg CO <sub>2</sub> e	2,36E+01	3,43E-02	1,63E-01	2,38E+01	3,34E-02	1,18E-02	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	5,62E-02	-1,25E-02

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows – CH<sub>4</sub> fossil, CH<sub>4</sub> biogenic and Dinitrogen monoxide – were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterisation factor for biogenic CO<sub>2</sub> is set to zero.

## SCENARIO DOCUMENTATION

### DATA SOURCES

#### Manufacturing energy scenario documentation

1. Diesel combusted in building machine, World, One Click LCA, 3.38 kgCO<sub>2</sub>e/l
2. Market for electricity, medium voltage, Finland, Ecoinvent, 0.15 kgCO<sub>2</sub>e/kWh
3. Market for electricity, medium voltage, United Kingdom, Ecoinvent, 0,25 kgCO<sub>2</sub>e/kWh
4. Market for electricity, medium voltage, Sweden, Ecoinvent, 0,0254 kgCO<sub>2</sub>e/kWh

#### Transport scenario documentation - A4 (Transport resources)

1. Transport, freight, lorry >32 metric ton, EURO5, 275,4 km

#### Transport scenario documentation A4

Scenario parameter	Value
Capacity utilization (including empty return) %	50
Bulk density of transported products	0,00E+00
Volume capacity utilization factor	1

#### Installation scenario documentation - A5 (Installation resources)

1. Market for electricity, medium voltage, Ecoinvent, 0.0357 kWh
2. Market for diesel, burned in building machine, Ecoinvent, 1.176E-5 MJ

#### Installation scenario documentation - A5 (Installation waste)

1. Treatment of waste wood, post-consumer, sorting and shredding, Ecoinvent, Materials for recycling, 0.042 kg
2. Treatment of waste wood, untreated, municipal incineration, Ecoinvent, 0.039 kg
3. Exported Energy: Electricity, Ecoinvent, 0.087 MJ
4. Exported Energy: Electricity, Ecoinvent, 0.0043 MJ
5. Exported Energy: Thermal, Ecoinvent, 0.12 MJ
6. Exported Energy: Thermal, Ecoinvent, 0.0059 MJ
7. Treatment of waste wood, untreated, sanitary landfill, Ecoinvent, 0.049 kg
8. Treatment of waste polyethylene, for recycling, unsorted, sorting, Ecoinvent, Materials for recycling, 6.8E-4 kg
9. Treatment of waste polyethylene, municipal incineration, Ecoinvent, 6.3E-4 kg
10. Treatment of waste polyethylene, sanitary landfill, Ecoinvent, 3.9E-4 kg

#### End-of-Life stages scenario documentation - C1-C4 (Data source)

1. Treatment of waste plastic, mixture, unsanitary landfill, dry infiltration class (100mm), Ecoinvent, 0.3442 kg
2. Treatment of scrap steel, inert material landfill, Ecoinvent, 0.6558 kg

Scenario information	Value
Scenario assumptions e.g. transportation	End of life scenario is that the item is left to the ground, and no transportation is needed for the waste.

## THIRD-PARTY VERIFICATION STATEMENT

EPD Hub declares that this EPD is verified in accordance with ISO 14025 by an independent, third-party verifier. The project report on the Life Cycle Assessment and the report(s) on features of environmental relevance are filed at EPD Hub. EPD Hub PCR and ECO Platform verification checklist are used.

EPD Hub is not able to identify any unjustified deviations from the PCR and EN 15802+A2 in the Environmental Product Declaration and its project report.

EPD Hub maintains its independence as a third-party body; it was not involved in the execution of the LCA or in the development of the declaration and has no conflicts of interest regarding this verification.

The company-specific data and upstream and downstream data have been examined as regards plausibility and consistency. The publisher is responsible for ensuring the factual integrity and legal compliance of this declaration.

The software used in creation of this LCA and EPD is verified by EPD Hub to conform to the procedural and methodological requirements outlined in ISO 14025:2010, ISO 14040/14044, EN 15804+A2, and EPD Hub Core Product Category Rules and General Program Instructions.

### Verified tools

Tool verifier: Magaly Gonzalez Vazquez

Tool verification validity: 27 March 2025 - 26 March 2028

Sarah Curpen, as an authorised verifier acting for EPD Hub Limited

10.11.2025

